Jigsaw
RUBBER MATTING

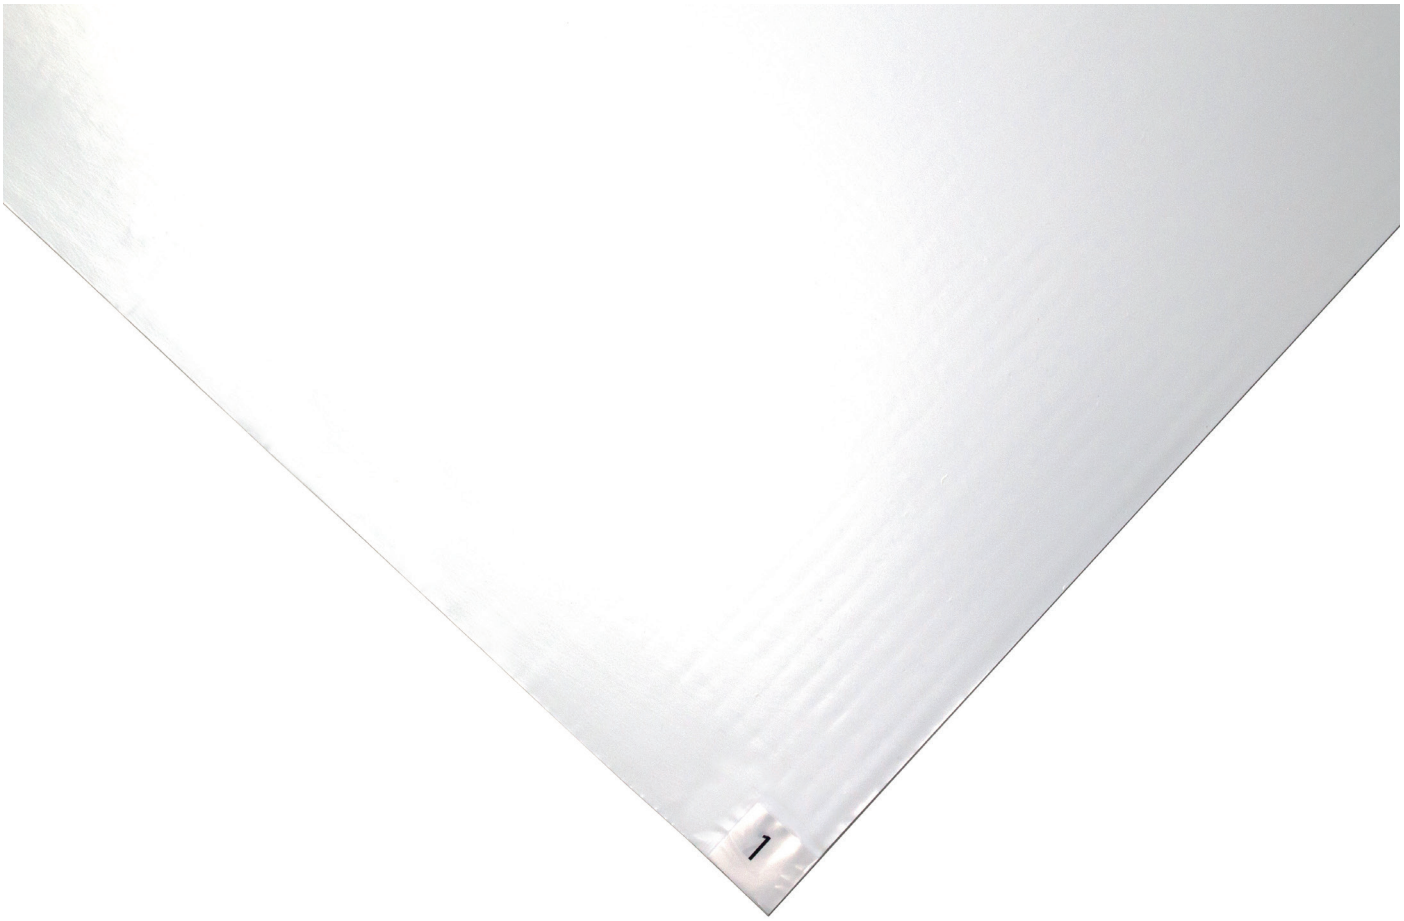

Installation Guidelines

First-Step

Materials

Materials

- First-Step Tack Mat

First Step tack Mat installation

In order for a mat to be installed according to specification and to perform well beyond its intended life cycle, it is imperative to take note of the following:

1

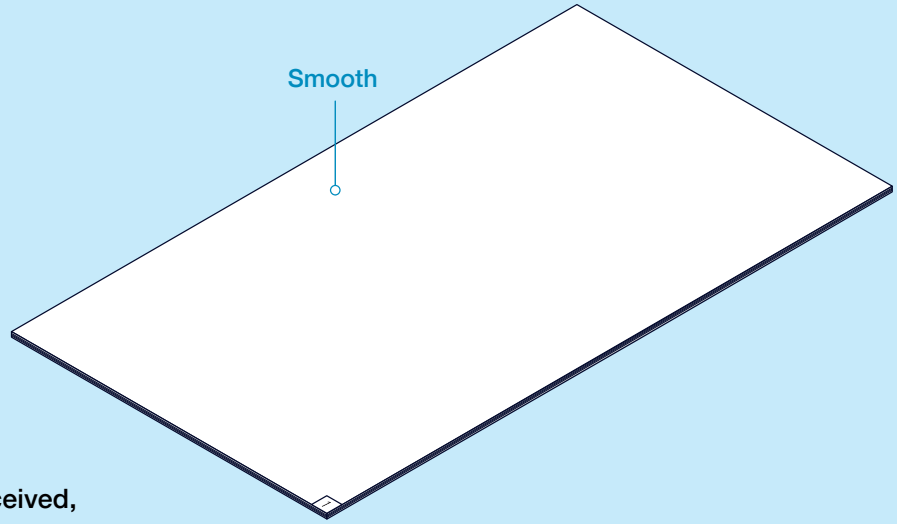

When mats are received, check the mat for folds in the sheet.

There should be no folds.

2

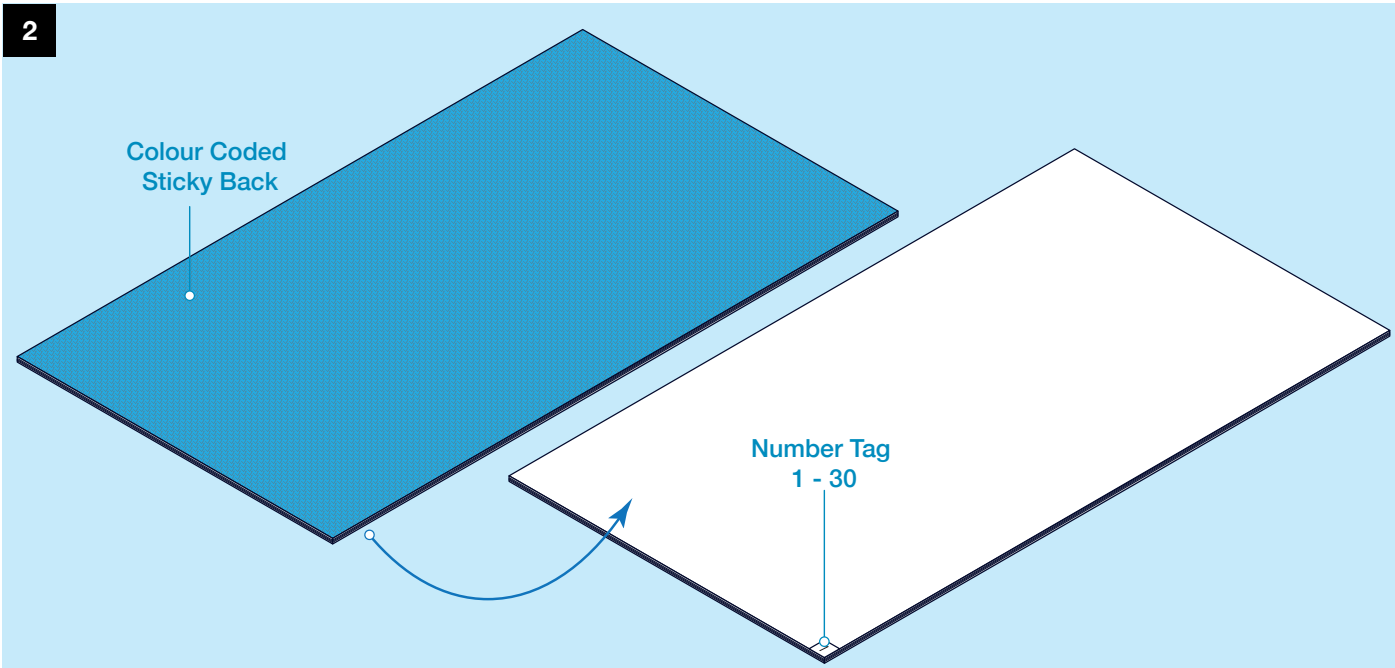

Now take a look on both sides of the sheet, one side will have a colour tag on it. This is the peelable sheet that will need to be removed in order to secure the sticky mat onto the respective floor surface.

On the other side, in one of the corners, there will be a number of tags. This number tag signifies the number of each sheet from 1 - 30.

3

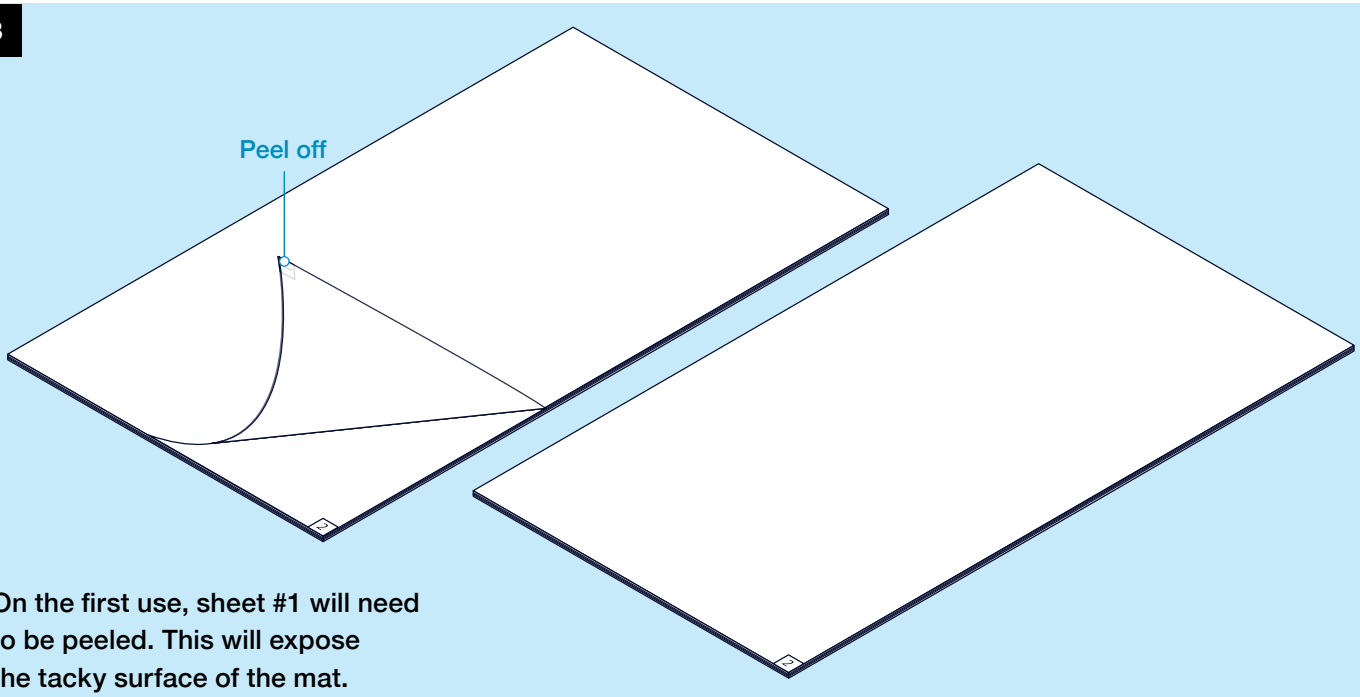

On the first use, sheet #1 will need to be peeled. This will expose the tacky surface of the mat.

4

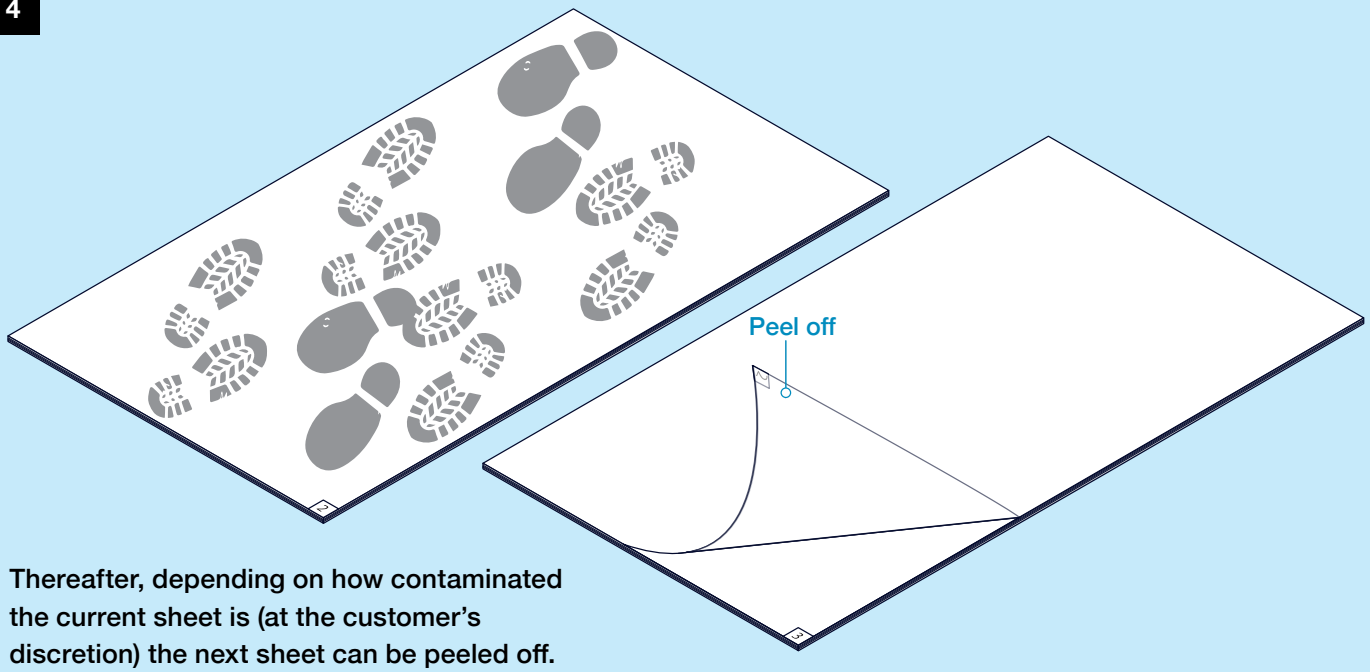

Thereafter, depending on how contaminated the current sheet is (at the customer's discretion) the next sheet can be peeled off.

5

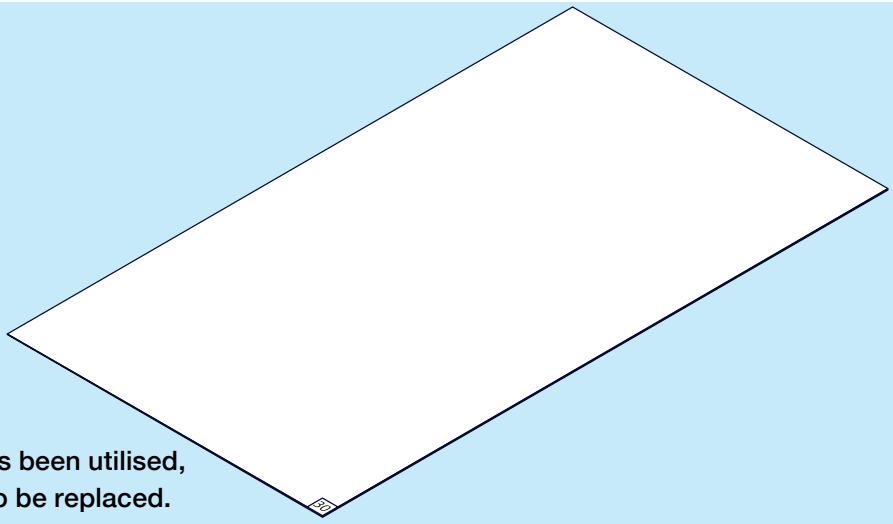

Once sheet #30 has been utilised, the mat will need to be replaced.

MORE THAN JUST
MATTING

Disclaimer
These methods of installation make no claim to being comprehensive but should be used as a guide. Always employ safe practices. A risk assessment and method statement should always be prepared.

01260 272313 | info@rubber-matting.co.uk