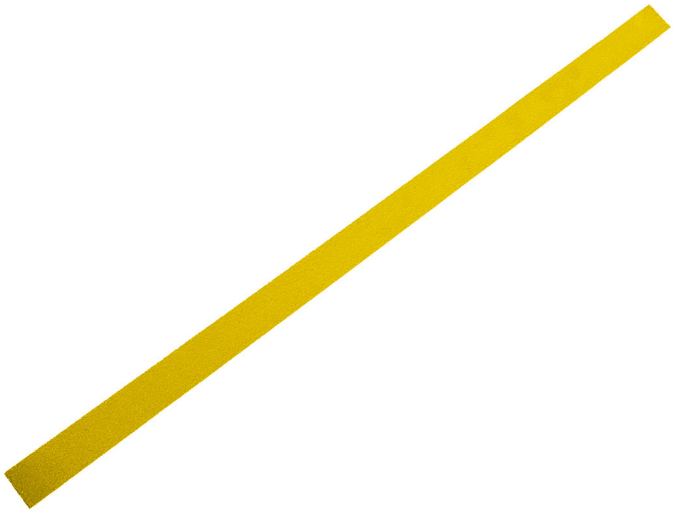

















# COBAGRiP® Decking Strips

## Avoid slipping hazards on outdoor walkways

- A fast and simple solution to provide slip resistance on decking and similar structures.
- Silicon carbide surface for high anti slip protection in both wet and dry conditions and the perfect solution to slippery decking during the winter months.
- Suitable for indoor and outdoor use and easily applied to wooden, metal or concrete surfaces.
- Suitable for use on decking, walkways, bridges, steps, construction environments, schools and leisure facilities.
- Simply bond or screw onto the existing floor surface.
- Made from 3 mm thick low profile sheet ensuring suitability with wheelchair traffic.
- Easy to cut to length.
- Available in a range of colours which meet the Equality Act requirements, including black, grey and yellow.
- Fire Tested to DIN 13501: Bfl – s1 (2018); EN ISO 11925-2:2020; EN ISO 9239-1:2010 (both 2021).
- Slip Tested to DIN 51130 – R13; BS 7976-2 – low slip potential.

## Styles Available



Yellow



Black



Grey

## Parts

| Part Number | Size | Colour | Weight (kg) |
|---|---|---|---|
| GRP012490 | 2400 mm x 90 mm x 3 mm | Black | 4.5 |
| GRP011290 | 1200 mm x 90 mm x 3 mm | Black | 2.7 |
| GRP062490 | 2400 mm x 90 mm x 3 mm | Grey | 2.5 |
| GRP061290 | 1200 mm x 90 mm x 3 mm | Grey | 1.6 |
| GRP072490 | 2400 mm x 90 mm x 3 mm | Yellow | 4.5 |
| GRP071290 | 1200 mm x 90 mm x 3 mm | Yellow | 2.7 |
| GRP012450 | 2400 mm x 50 mm x 3 mm | Black | 2.5 |
| GRP011250 | 1200 mm x 50 mm x 3 mm | Black | 1.6 |
| GRP062450 | 2400 mm x 50 mm x 3 mm | Grey | 4.5 |
| GRP061250 | 1200 mm x 50 mm x 3 mm | Grey | 2.7 |
| GRP072450 | 2400 mm x 50 mm x 3 mm | Yellow | 2.5 |
| GRP071250 | 1200 mm x 50 mm x 3 mm | Yellow | 1.6 |

## Technical Specifications

| | |
|---|---|
| **Material** | GRP with quartz grit bonded on top (with resin) |
| **Product Height** | 3 mm |
| **Min. Operating Temperature** | -50 |
| **Max. Operating Temperature** | +90 |
| **Environmental Resistance** | Suitable for indoor and outdoor environments |
| **Typical Applications** | External walkways / decking areas |
| **Installation Method** | Bond or screw to surface |
| **Cleaning Method** | Brushing and flushing with a mild detergent solution. |
| **Fire Tested to** | DIN 13501: Bfl – s1 (2018) & EN ISO 11925-2:2020 & EN ISO 9239-1:2010 (both 2021) |
| **Guarantee** | 2 Years |
| **Slip Tested to** | DIN 51130 – R13 & BS 7976-2 |

## Additional Information

COBAGRiP EN ISO9239 1 2010 Reaction to Fire

COBAGRiP EN ISO11925 2 2020 Reaction to Fire

COBAGRiP Fire Test EN13501 1 2018 (1)

COBAGRiP Pendulum Slip Test BS 7676

COBAGRiP Ramp Slip Test DIN 51130