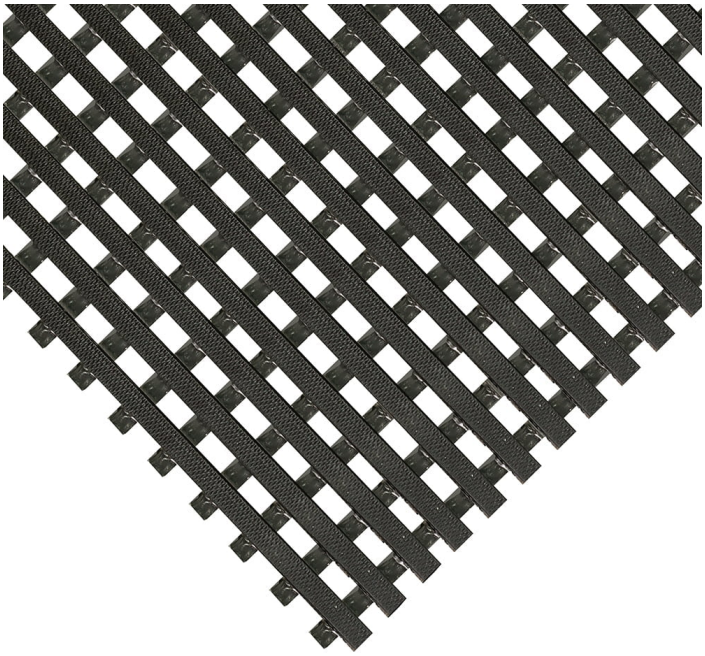

# DeckStep

## Multi-purpose ribbed vinyl matting for industry

- Keep feet above wet floor surfaces.
- Helps reduce the risk of slips by providing a raised, slip-resistant surface underfoot.
- Provides a much more comfortable standing surface than concrete.
- Textured surface provides slip resistance.
- Flexible and lightweight – easy to move and clean.
- Strips are welded together for strength.
- Slip tested to DIN 51130.

















## Styles Available



Red



Grey



Green



Blue



Black

## Parts

| Part Number | Size | Colour | Weight (kg) |
|---|---|---|---|
| DS061210C | 1.2 m x per linear metre | Grey | 9 |
| DS011010C | 1.0 m x per linear metre | Black | 7.5 |
| DS011010 | 1.0 m x 10 m | Black | 75 |
| DS061210 | 1.2 m x 10 m | Grey | 90 |
| DS010610C | 0.59 m x per linear metre | Black | 4.5 |
| DS061010C | 1.0 m x per linear metre | Grey | 7.5 |
| DS010610 | 0.59 m x 10 m | Black | 45 |
| DS061010 | 1.0 m x 10 m | Grey | 75 |
| DS060610C | 0.59 m x per linear metre | Grey | 4.5 |
| DS060610 | 0.59 m x 10 m | Grey | 45 |
| DS041210C | 1.2 m x per linear metre | Green | 9 |
| DS041210 | 1.2 m x 10 m | Green | 90 |
| DS041010C | 1.0 m x per linear metre | Green | 7.5 |
| DS041010 | 1.0 m x 10 m | Green | 75 |
| DS040610C | 0.59 m x per linear metre | Green | 4.5 |
| DS040610 | 0.59 m x 10 m | Green | 45 |
| DS031210C | 1.2 m x per linear metre | Red | 9 |
| DS031210 | 1.2 m x 10 m | Red | 90 |
| DS031010C | 1.0 m x per linear metre | Red | 7.5 |
| DS031010 | 1.0 m x 10 m | Red | 75 |
| DS030610C | 0.59 m x per linear metre | Red | 4.5 |
| DS030610 | 0.59 m x 10 m | Red | 45 |
| DS021210C | 1.2 m x per linear metre | Blue | 9 |
| DS021210 | 1.2 m x 10 m | Blue | 90 |
| DS021010C | 1.0 m x per linear metre | Blue | 7.5 |
| DS021010 | 1.0 m x 10 m | Blue | 75 |
| DS020610C | 0.59 m x per linear metre | Blue | 4.5 |
| DS020610 | 0.59 m x 10 m | Blue | 45 |
| DS011210C | 1.2 m x per linear metre | Black | 9 |

## Technical Specifications

| | |
|---|---|
| **Material** | PVC |
| **Surface Finish** | Cross ribbed lattice |
| **Product Height** | 11.5 mm |
| **Product Weight** | 7.5 kg / m² |
| **Min. Operating Temperature** | -30°C |
| **Max. Operating Temperature** | +60°C |
| **Resistance to Chemicals** | Resistant to acid and alkali |
| **Environmental Resistance** | Suitable for wet and dry indoor environments |
| **Typical Applications** | General industrial, production lines, assembly areas, packing stations, workbenches |
| **Installation Method** | Loose lay |
| **Cleaning Method** | Easily cleaned with hot soapy water or pressure washer |
| **Slip Tested to** | DIN 51130 - R10 |

| Part Number | Size | Colour | Weight (kg) |
|---|---|---|---|
| DS011210 | 1.2 m x 10 m | Black | 90 |

## Additional Information

Deckstep DIN 51097 Ramp Slip Test

Deckstep DIN 51130 Ramp Slip Test