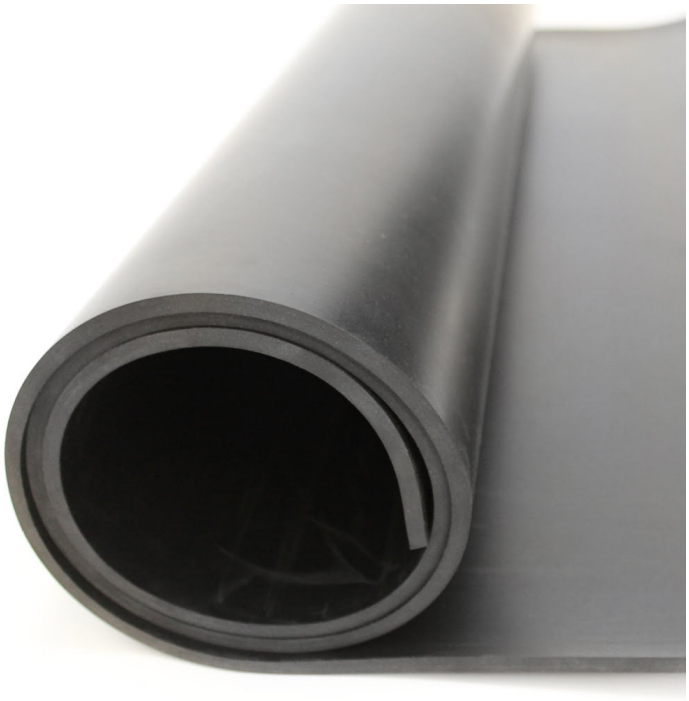







Commercial Black Rubber

General purpose grade for water applications and diluted chemicals



- Versatile ‘general purpose’ grade rubber sheeting, often used in marine applications.
- Ideal for low cost waterproof seals and gaskets.
- 68 degrees shore A hardness.
- Tensile strength at break: 3.0 Mpa.
- Elongation at break: 200%.

Parts

Part Number	Size	Colour	Weight (kg)
CRS00001C	1.4 m x per linear metre (1.5 mm)	Black	3.6
CRS00002C	1.4 m x per linear metre (3 mm)	Black	6.86
CRS00003C	1.4 m x per linear metre (4.5 mm)	Black	10.41
CRS00004C	1.4 m x per linear metre (6 mm)	Black	13.6
CRS00005C	1.4 m x per linear metre (8 mm)	Black	17.76
CRS00006C	1.4 m x per linear metre (10 mm)	Black	23.11
CRS00007C	1.4 m x per linear metre (12 mm)	Black	26.17
CRS00008C	1.4 m x per linear metre (20 mm)	Black	45
CRS00009	1.4 m x 5.0 m (25 mm)	Black	270
CRS00008	1.4 m x 5.0 m (20 mm)	Black	225
CRS00007	1.4 m x 5.0 m (12 mm)	Black	130.85

Part Number	Size	Colour	Weight (kg)
CRS00006	1.4 m x 5.0 m (10 mm)	Black	115.55
CRS00005	1.4 m x 5.0 m (8 mm)	Black	88.8
CRS00004	1.4 m x 10 m (6 mm)	Black	136.05
CRS00003	1.4 m x 10 m (4.5 mm)	Black	104.1
CRS00002	1.4 m x 10 m (3 mm)	Black	68.65
CRS00001	1.4 m x 10 m (1.5 mm)	Black	36

Technical Specifications

Material	SBR
Surface Finish	Smooth
Product Height	1.5 mm-25 mm
Roll Length	5 m, 10 m
Min. Operating Temperature	-30°C
Max. Operating Temperature	+80°C
Resistance to Chemicals	Resistant to dilute chemicals
Other Product Performance Information	Test Temperature 25°C Relative Humidity 35% Test by GB5574-94 Correlation criterion GB/T528-1998 GB/T3512-1989 GB/T531-1992