







Commercial Black Neoprene Rubber

High resistance to mineral oils, greases, dilute acids and alkalis

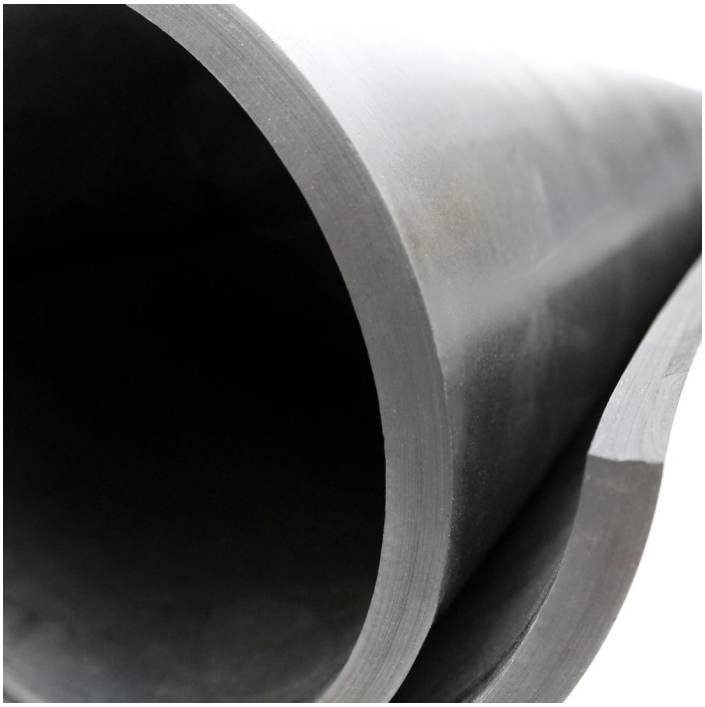

- Good ageing and weathering properties, ideal for outdoor use.
- Hardwearing Neoprene is heat, chemical, oil, fire and ozone resistant.
- 65 degrees shore A hardness.
- Tensile strength at break: 6.0 Mpa.
- Elongation at break: 250%.

Parts

Part Number	Size	Colour	Weight (kg)
NES00001C	1.4 m x per linear metre (1.5 mm)	Black	3.1
NES00002C	1.4 m x per linear metre (3 mm)	Black	6.14
NES00003C	1.4 m x per linear metre (4.5 mm)	Black	9.05
NES00004C	1.4 m x per linear metre (6 mm)	Black	12.6
NES00005C	1.4 m x per linear metre (10 mm)	Black	21.8
NES00006C	1.4 m x per linear metre (12 mm)	Black	25.31
NES00007C	1.4 m x per linear metre (20 mm)	Black	33.71
NES00008	1.4 m x 5.0 m (25 mm)	Black	290
NES00007	1.4 m x 5.0 m (20 mm)	Black	236
NES00006	1.4 m x 5.0 m (12 mm)	Black	126.6
NES00005	1.4 m x 5.0 m (10 mm)	Black	109

Part Number	Size	Colour	Weight (kg)
NES00004	1.4 m x 10 m (6 mm)	Black	125
NES00003	1.4 m x 10 m (4.5 mm)	Black	90.55
NES00002	1.4 m x 10 m (3 mm)	Black	61.4
NES00001	1.4 m x 10 m (1.5 mm)	Black	31

Technical Specifications

Material	CR and SBR
Surface Finish	Smooth
Product Height	1.5 mm - 25 mm
Roll Length	5 m, 10 m
Min. Operating Temperature	-20°C
Max. Operating Temperature	+80°C
Resistance to Chemicals	Effective resistance to mineral oils, greases, dilute acids and alkalis.
Typical Applications	Suitable for outdoor applications
Other Product Performance Information	Test Temperature 25°C Relative Humidity 35% Correlation criterion GB/T528-1998 GB/T3512-1989 GB/T531-1992