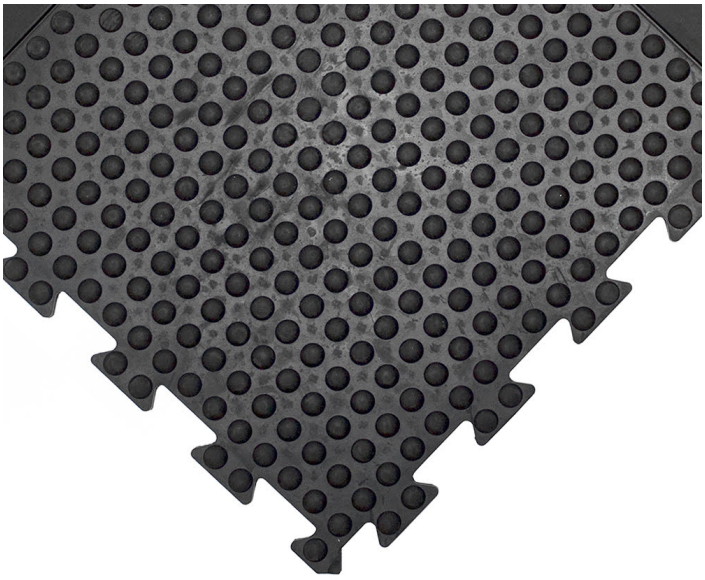

Bubblemat Connect

Interlocking anti-fatigue mat system designed for flexible coverage



- Durable anti-fatigue matting system.
- Raised bubbled surface to stimulate blood circulation and reduction of fatigue.
- Interlocking system provides flexibility in the type of shape that can be created.
- Soft but sturdy rubber material offers protection from adverse effects from cold, hard concrete floors.
- Rubber is naturally slip resistant.












Parts

Part Number	Size	Colour	Weight (kg)
BF010709	50 cm x 50 cm	Black/Yellow	2

Part Number	Size	Colour	Weight (kg)
BF010708	50 cm x 50 cm	Black/Yellow	2
BF010009	50 cm x 50 cm	Black	2.3
BF010008	50 cm x 50 cm	Black	2
BF010007	50 cm x 50 cm	Black	1.8

Technical Specifications

Material	Natural rubber
Recycled Material Content %	43% recycled content
Surface Finish	Bubble
Product Height	13.5 mm
Product Weight	5,75 kg
Min. Operating Temperature	-30°C
Max. Operating Temperature	+50°C
Resistance to Chemicals	Not resistant to fat and mineral oil
Environmental Resistance	Suitable for dry indoor environments
UV Resistance	Yes
Typical Applications	General Industrial
Installation Method	Loose lay interlocking mats
Cleaning Method	Use a high pressure hose (not exceeding 60psi) to remove the dirt and debris on the mats. For best results use a mild detergent (pH 4.0-9.0) to clean the mats. Do not use steam or degreasers or caustic chemicals. Do not mechanically scrub the mats.
Tensile Strength	3 MPa
Elongation	250%
Manufacturing process	Compression moulding