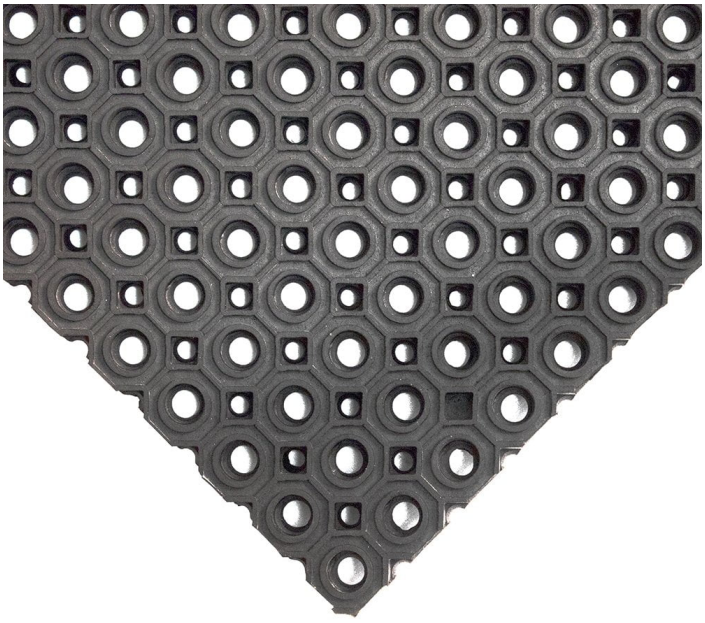

Octoroll

Ultra-tough rubber entrance matting by the metre

MADE FROM RECYCLED MATERIALS

- The ideal choice for demanding entrances.
- Perfect for outside use - rubber is naturally slip resistant.
- Hardwearing and durable.
- Withstands even the most demanding weather conditions with an operating temperature from -20°C to +130°C.
- Large holes allow debris to fall through the mat and provides good drainage for rainwater.
- The surface pattern scrapes dirt and debris from footwear.
- Easy to install. .







Parts

Part Number	Size	Colour	Weight (kg)
RM010014	1.0 m x 9.3 m	Black	73
RM010014C	1.0 m x per linear metre	Black	7.3

Technical Specifications

Material	Rubber mix, including >50% recycled material
Recycled Material Content %	75%
Surface Finish	Open holes
Product Height	13 mm
Min. Operating Temperature	-20°C
Max. Operating Temperature	+130°C
Environmental Resistance	Suitable for wet and dry environments, indoors or outdoors
UV Resistance	Yes
Installation Method	Loose lay
Cleaning Method	Wash with cold water, use vacuum cleaner or use pressure pump to remove dirt