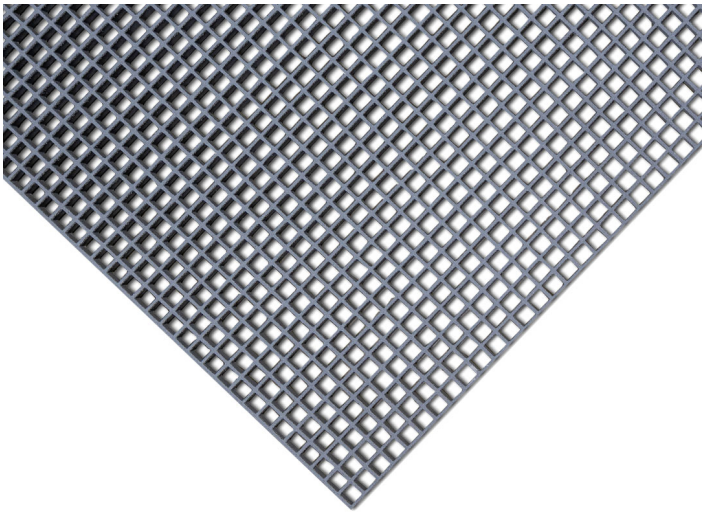

COBAGRiP® Grating

GRP grating for platforms, walkways, flooring, and covers

- Made from tough, hard-wearing GRP with a grit surface for excellent slip resistance.
- The paint pigment used in the product complies with ASTM E1645-01, ensuring the product is safe and reduces the risk of lead exposure to meet regulatory standards.
- A high-quality flooring option that offers a credible alternative to steel mesh grating.
- The quartz crystal-bonded top surface provides extreme durability and high slip resistance.
- Perfect for high-traffic areas or demanding, corrosive environments.
- Half the weight of steel solutions, making it easy to install with no ongoing maintenance.
- M-type, C-type and L-type clip accessories available for secure installation on edges.
- Manufactured from Type O, Orthophthalic Polyester resin, ensuring high performance and durability.
- Strong bi-directional properties allow the product to be used in various applications, making it more versatile.
- Slip tested to EN 16165:2021 Annex B.
- Fire tested to EN 13501-1:2018.













Styles Available



Gray



Yellow



Green

Parts

Part Number	Size	Colour	Weight (kg)
GRP070004G	2000 mm x 1000 mm (38 mm)	Yellow	38
GRP070003G	3660 mm x 1220 mm (25 mm)	Yellow	58
GRP070002G	3000 mm x 1000 mm (25 mm)	Yellow	39
GRP070001G	2000 mm x 1000 mm (25 mm)	Yellow	26
GRP060009G	3660 mm x 1220 mm (50 mm)	Grey	93.8
GRP060008G	3000 mm x 1000 mm (50 mm)	Grey	63
GRP060007G	2000 mm x 1000 mm (50 mm)	Grey	42
GRP060006G	3660 mm x 1220 mm (38 mm)	Grey	84.8
GRP060005G	3000 mm x 1000 mm (38 mm)	Grey	57
GRP060004G	2000 mm x 1000 mm (38 mm)	Grey	38
GRP060003G	3660 mm x 1220 mm (25 mm)	Grey	58
GRP060002G	3000 mm x 1000 mm (25 mm)	Grey	39
GRP060001G	2000 mm x 1000 mm (25 mm)	Grey	26
GRP040009G	3660 mm x 1220 mm (50 mm)	Green	93.8
GRP040008G	3000 mm x 1000 mm (50 mm)	Green	63
GRP040007G	2000 mm x 1000 mm (50 mm)	Green	42
GRP040006G	3660 mm x 1220 mm (38 mm)	Green	84.8
GRP040005G	3000 mm x 1000 mm (38 mm)	Green	57
GRP040004G	2000 mm x 1000 mm (38 mm)	Green	38
GRP040003G	3660 mm x 1220 mm (25 mm)	Green	58
GRP040002G	3000 mm x 1000 mm (25 mm)	Green	39
GRP040001G	2000 mm x 1000 mm (25 mm)	Green	26
GRP070009G	3660 mm x 1220 mm (50 mm)	Yellow	93.8
GRP070008G	3000 mm x 1000 mm (50 mm)	Yellow	63
GRP070007G	2000 mm x 1000 mm (50 mm)	Yellow	42
GRP070006G	3660 mm x 1220 mm (38 mm)	Yellow	84.8
GRP070005G	3000 mm x 1000 mm (38 mm)	Yellow	57

Technical Specifications

Material	GRP with quartz grit bonded on top (with resin)
Surface Finish	Quartz grit
Min. Operating Temperature	-50°C
Max. Operating Temperature	+60°C
Environmental Resistance	Suitable for indoor and outdoor environments
Typical Applications	Indoor and outdoor walkways and platforms
Fire Tested to	Fire tested to EN 13501-1:2018
Slip Tested to	Slip test to EN 16165:2021 Annex B

Additional Information


Installation Guide


COBAGRIP EN ISO9239 1 2010 Reaction to Fire (25 mm)


COBAGRIP EN ISO9239 1 2010 Reaction to Fire (50 mm)


COBAGRIP EN ISO11925 2 2020 Reaction to Fire_k33hye


COBAGRIP Fire Test EN13501 1 2018_al3s8z


COBAGRIP Ramp Slip Test EN16165 2021